


RECHTER ZIJGEVEL

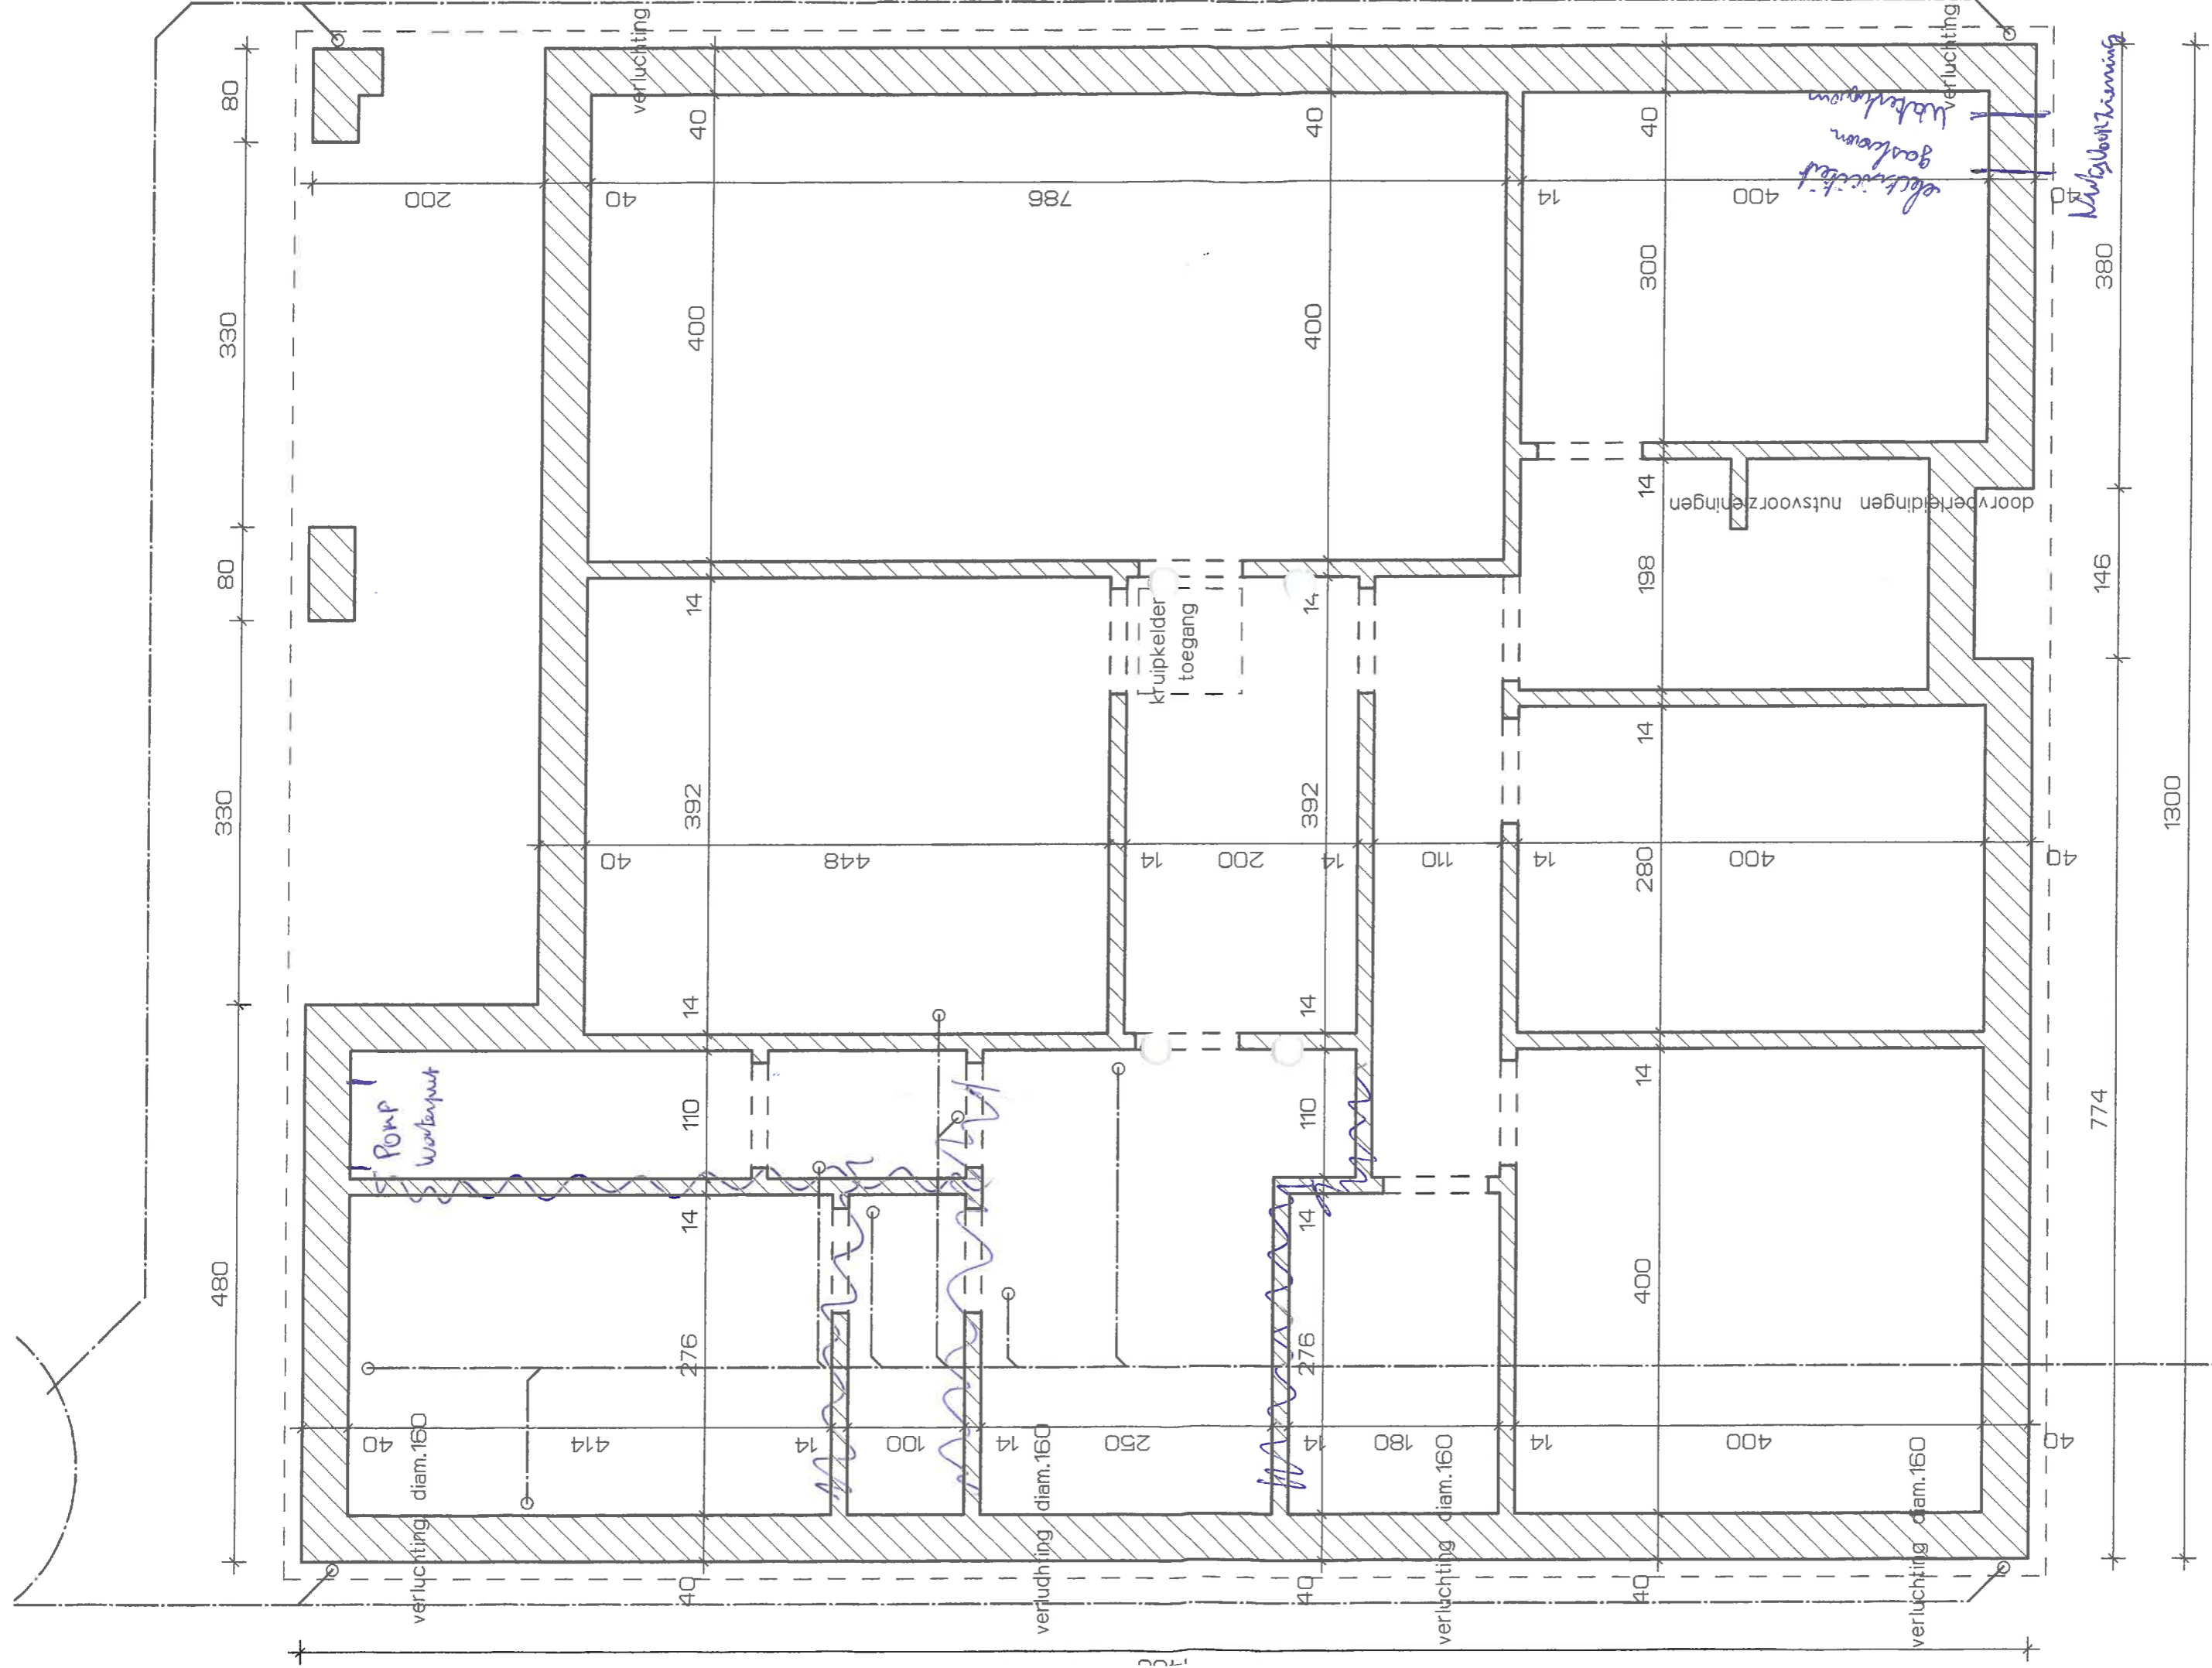

480 330 80 330 80 380 1300

verluchting diam.160

414

14

276

100

14

verluchting diam.160

250

14

276

verluchting diam.160

180

14

400

verluchting diam.160

400

14

Pomp waterput

14

110

14

392

448

14

14

200

14

14

280

400

14

40

14

392

448

14

Kruipkelder toegang

14

200

14

198

14

14

14

40

40

400

786

40

400

400

14

300

400

elektrische gaslozen

waterlozen


40

380

Nutsvoorziening

doorbereden nutsvoorzieningen

KRUIPKELDER FUNDERING RIOLERING



N/A